

FAST A4 COLOUR PRINTING FOR OPTIMISED OFFICE PRODUCTIVITY




Canon uniFLOW Online
Outstanding Cloud Output Management Solution



MAIN CONFIGURATION OPTIONS

Choice of paper supply options*

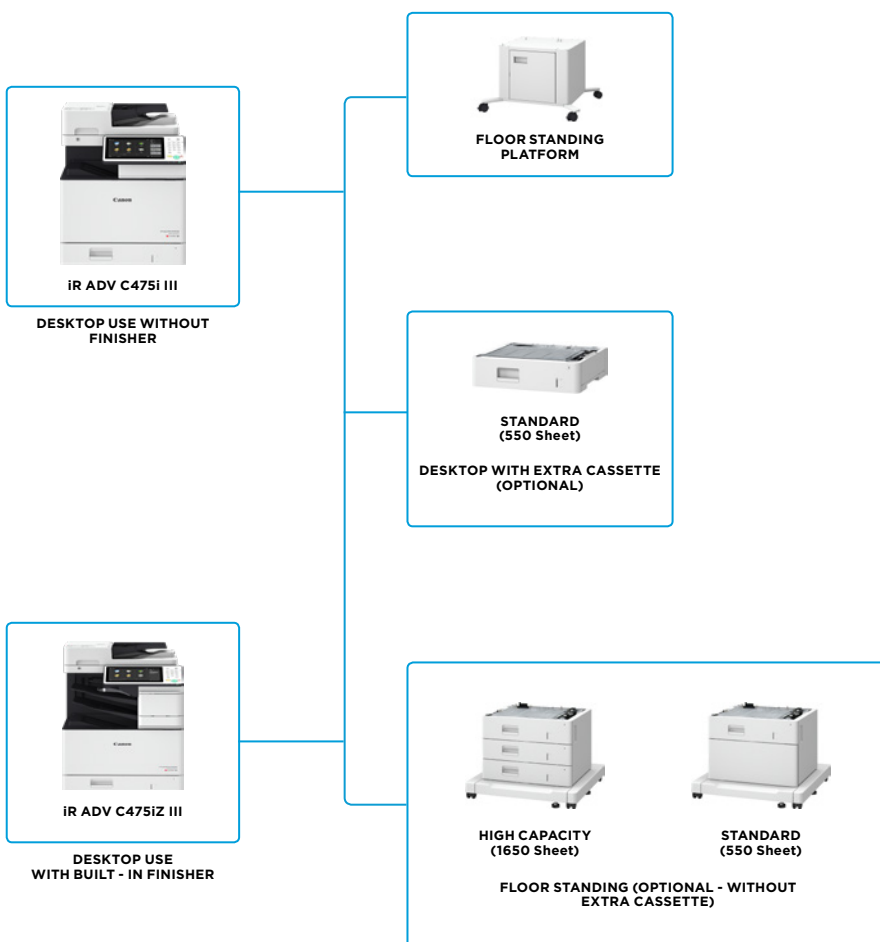

* Paper supply options include up to two additional cassettes for non finisher and finisher models.

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online product configurator.

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE C475i III series

MAIN UNIT		COPY SPECIFICATIONS	
Machine type	A4 Colour Laser Multifunctional	Copy Speed* (ppm; BW and CL) * Simplex	iR-ADV C475i III / C475iZ III up to 47 (A4), up to 73 (A5), up to 39 (A5R), up to 49 (A6)
Core functions	Print, Copy, Scan, Send, Store and Optional Fax	First-Copy-Out Time (A4; BW/ CL)	Approx. 5.1 / 5.8 seconds or less
Processor	Canon Dual Custom Processor (Shared)	Copy	600 x 600
Control Panel	25.6 cm (10.1 inch) TFT LCD WSVGA Colour Touch panel	Multiple Copies	Up to 9,999 copies
Memory	Standard: 4.0GB RAM	Copy Density	Automatic or Manual (9 Levels)
Hard Disk drive	Standard: 250GB	Magnification	25% - 400% (1% Increments)
Interface Connection	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n); Optional: NFC, Bluetooth Low Energy OTHERS Standard: USB 2.0 (Host) x1, USB 3.0 (Host) x1, USB 2.0 (Device) x1; Optional: Copy Control Interface	Preset Reductions	25%, 50%, 70 %
Paper Supply Capacity (A4, 80 gsm)	Standard: 590 sheets Paper Cassette: 500-sheet cassette, 90-sheet Multi-purpose tray Maximum: 2,090 sheets* (with Cassette Feeding Unit-ATT)	Preset Enlargements	141%, 200%, 400%
Paper output capacity (A4, 80 gsm)	Standard model (iR-ADV C475i III): 400 sheets Finisher model (iR-ADV C475iZ III): 900 sheets*	Basic Copy Features	Preset R/E Ratios by Area, Paper Setting, Previous Setting, Favourite Setting, Finishing, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Setting Confirmation/Cancel
Finishing capabilities	Standard model: Collate, Group Finisher Model: Collate, Group, Offset, Staple	Special Copy Features	Two-sided Original, Finishing, Job Build, N on 1, Density Adjustment, Original Type Selection, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Shift, Job Done Notice, Copy ID Card, Skip Blank Pages, Detect Feeder Multi Sheet Feed, Adjust One-Touch Colour, Colour Balance
Supported media types	Multi-purpose tray: Thin, Plain, Recycled, Thick, Colour, Bond, Envelope Paper Cassette: Thin, Plain, Recycled, Thick, Colour, Label, Bond	SCAN SPECIFICATIONS	
Supported media sizes	Multi-purpose tray: Standard size: A4, A5, A5R, A6, B5, Envelopes [No.10 (COM10), Monarch, ISO-C5, DL] Custom size: 76.0 x 127.0 mm to 215.9 x 355.6 mm Paper Cassette: Standard size: A4, A5, A5R, A6, B5 Custom Size: 101.6 x 148.0 mm to 215.9 x 355.6 mm	Type	Standard: Colour Platen and Single-pass Duplexing Automatic Document Feeder* [2-sided to 2-sided (Automatic with DADF)] * Detect Feeder Multi Sheet Feed is supported.
Supported media weights	Multi-purpose tray: 60 to 216 gsm Paper Cassette: 60 to 163 gsm Duplex: 60 to 163 gsm	Document Feeder Paper Capacity (80 gsm)	100 Sheets
Warm-up Time	From Power On: 10 seconds or less* * Time from device power-on, until copy ready (not print reservation) From Sleep Mode: 10 seconds or Less Quick Startup Mode: 4 seconds or less* * Time from device power-on to when key operation can be performed on the touch panel display.	Acceptable Originals and weights	Platen: Sheet, Book, 3-Dimensional Objects (Height: Up to 30 mm, Weight: up to 2kg) Document Feeder media weight: 1-sided scanning: 42 to 128 gsm (BW)*, 64 to 128 gsm (CL) 2-sided scanning: 50 to 128 gsm (BW)*, 64 to 128 gsm (CL) * A6: 52 to 128 gsm (BW)
Dimensions (W x D x H)	Standard model: 521 x 645 x 668 mm Finisher model: 521 x 645 x 864 mm When the optional Paper Feeding Unit is attached: Standard model: 642 x 668 x 1124 mm Finisher model: 642 x 668 x 1,320 mm	Supported media sizes	Platen: max. scanning size: 216.0 x 355.6 mm Document Feeder media size: A4, A5, A6, B5, Custom size: 105.0 x 148 mm to 216.0 x 355.6 mm
Installation Space(W x D)	950 x 840 mm (with left cartridge door open + right door open + the cassette drawer open)	Scan Speed (ipm; BW and CL, A4)	1-sided Scanning: 50 (300 x 300 dpi, send), 50 (300 x 600 dpi, copy)*, 30 (600 x 600 dpi, copy) 2-sided Scanning: 100 (300 x 300 dpi, send), 100 (300 x 600 dpi, copy)*, 50 (600 x 600 dpi, copy)
Weight (Including toner)	Standard model: Approx. 46 kg Finisher model: Approx. 55 kg	Scan Resolution (dpi)	600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100
PRINT SPECIFICATIONS		Pull Scan Specifications	Colour Network ScanGear2. For both TWAIN and WIA Supported OS: Windows 7 / 8.1 / 10 / Server 2008 / Server 2008 R2 / Server 2012 / Server 2016
Print Speed* (ppm; BW and CL) * Simplex	iR-ADV C475i III / C475iZ III up to 47 (A4), up to 73 (A5), up to 39 (A5R), up to 49 (A6)	Scan Method	Send functionality available on all models Scan to USB Memory: Available on all models Scan to Mobile Devices and cloud-based services: A range of solutions is available to provide scanning to mobile devices or cloud-based services depending on your requirements. Please contact your sales representative for further information. TWAIN/WIA Pull scanning available on all models
Print Resolution* (dpi)	600 x600, 1200 x1200	SEND SPECIFICATIONS	
Page description languages	Standard: UFR II, PCL* 6, Genuine Adobe® PostScript® Level 3	Destination	Standard: E-mail/Internet FAX (SMTP), SMB v3.0, FTP, WebDAV, Mail Box, Optional: Super G3 FAX, IP Fax
Direct Print	Available from USB memory, Advanced space, Remote UI and Web Access* Supported file types: TIFF, JPEG, PDF, EPS, and XPS *Only PDF print from websites is supported	Address Book	LDAP (2,000)/Local (1,600)/Speed dial (200)
Printing from mobile and cloud	A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information.	Send resolution (dpi)	600 x 600, 400 x 400, 300 x 300, 200 x 400, 200 x 200, 200 x 100, 150 x 150, 100 x 100
Fonts	PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT J/K/S/T*1 (Japanese, Korean, Simplified and Traditional Chinese), Barcode fonts*2 PS fonts: 136 Roman *1 Requires optional PCL International Font Set-A1 *2 Requires optional Barcode Printing Kit-D1	Communication protocol	File: FTP (TCP/IP), SMB v3.0, WebDAV E-mail/I-Fax: SMTP, POP3
Print Features	Suspend Job Timeout, Profile Settings, Secured Print, Encrypted Secure Print, Watermark, Header/Footer, Page Layout, Two-sided Printing, Collating, Booklet Printing, Grouping, Offsetting, Toner Reduction, Poster Printing, Forced Hold Printing	File Format	Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply policy, Optimize for Web, PDF A/1-b, Encrypted, Device Signature), XPS (Compact, Searchable, Device Signature), Office Open XML (PowerPoint, Word) Optional: PDF (Trace & Smooth, User Signature), XPS(User Signature)
Operating System	UFR II: Windows* 7 / 8.1 / 10 / Server 2008 / 2008 R2 / 2012 / 2012 R2 / 2016, MAC OS X (10.9 or later) PCL: Windows* 7 / 8.1 / 10 / Server 2008 / 2008 R2 / 2012 / 2012 R2 / Server 2016 PS: Windows* 7 / 8.1 / 10 / Server 2008 / 2008 R2 / 2012 / 2012 R2 / 2016, MAC OS X (10.9 or later) PPD: MAC OS X (10.3.9 or later), Windows* 7 / 8.1 / 10 SAP Device Types are available via the SAP Market Place. Please refer to http://www.canon-europe.com/support/business-product-support for availability of print solutions for other operating systems and environments including AS/400, UNIX, Linux and Citrix. Some of these solutions are chargeable.	Universal Send Features	Original Type Selection, Two-sided Original, Density Adjustment, Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Report, Original Content Orientation, Skip Blank Pages, Detect Feeder Multi Sheet Feed
		FAX SPECIFICATIONS	
		Maximum Number of Connection Lines	1
		Modem Speed	Super G3: 33.6 kbps G3: 14.4 kbps
		Compression Method	MH, MR, MMR, JBIG
		Resolution (dpi)	400 x 400, 200 x 400, 200 x 200, 200 x 100
		Sending/Recording Size	A4, A5*, A6* and B5* / A4, A5, B5 *Sent as A4
		FAX memory	Up to 30,000 pages
		Speed dials	Max. 200

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE C475i III series

Group dials/destinations	Max. 199 dials	CONSUMABLES	
Sequential broadcast	Max. 256 addresses	Toner Cartridges	TONER T04 BK/C/M/Y
Memory backup	Yes	Toner Yield	TONER T04 BK: 33,000 pages* TONER T04 C/M/Y: 27,500 pages* *Toner Cartridge yield in accordance with ISO/IEC 19798.
Fax Features	Original Type Selection, Two-sided Original, Density (for Scanning), Sharpness, Erase Frame, Job Build, Sender's Name (TTI), Selecting the Telephone Line, Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Detect Feeder Multi Sheet Feed	SOFTWARE AND PRINTER MANAGEMENT	
STORE SPECIFICATIONS		Tracking and reporting	Universal Login Manager (ULM): Manage your costs easily by using the embedded reporting capability to identify and control costs on a user-based level by device, uniFLOW Online Express: Combining with ULM you can gain further control and highlight expenditures per users/department and pinpoint where costs can be scaled down from a central cloud based location.
Mail Box (Number supported)	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes, 30,000 Maximum Pages Stored	Remote management tools	iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management) eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance) Content Delivery System: Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web based interface to each device that helps to provide remote device management and control
Advanced Space	Communication Protocol: SMB or WebDAV Supported Client PC: Windows (Windows 7 / 8.1 / 10) Concurrent Connections (Max.): SMB: 64, WebDAV: 3 (Active Sessions)	Scanning software	Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device
Advanced Space available disc space	Approx. 16GB (Standard HDD)	Optimisation tools	Canon Driver Configuration Tool: A utility for changing the factory default settings of Canon print drivers NetSpot Device Installer: Simple utility software that allows you to make network protocol settings for Canon devices connected to your network.
Advanced Space Features:	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support	Platform	MEAP (Multifunctional Embedded Application Platform): A powerful JAVA Embedded Platform for Canon devices which provides tight coupling between a range of software solutions and the device. MEAP Web: Web service alternative to MEAP that allows MFP applications to be developed and deployed via web services
Memory Media	Standard: USB Memory	Document Publishing	IW DESKTOP: Powerful print publishing software which easily combines documents from different sources and file formats, applies finishing with preview and templates to create professional looking documents. Includes PDF creation, annotation and compression capabilities for simple digital workflows such as proofing and authorisation
SECURITY SPECIFICATIONS		PAPER SUPPLY OPTIONS	
Authentication	Standard: Universal Login Manager* (Device and Function Level Log-in), uniFLOW Online Express**, User Authentication, Department ID Authentication, Access Management System Optional: My Print Anywhere secure print (Requires uniFLOW) * Installation, activation and registration required ** No charge for this solution; however activation is required.	Cassette Feeding Unit-AS1	Paper Capacity: 500 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Thick, Colour, Labels, Bond Paper Size: A4, A5, A5R, A6, B5, Custom size: 101.6 x 148.0 mm to 215.9 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 642 x 657 x 456 mm (attached to the main unit) Weight: Approx. 19 kg
Data	Standard: Trusted Platform Module (TPM), Hard Disk Password Lock, Hard Disk Drive Erase, Mail Box Password Protection, Hard Disk Drive Encryption(FIPS140-2 Validated), Common Criteria Certification (DIN ISO 15408) Optional: Data Loss Prevention (Requires uniFLOW)	Cassette Feeding Unit-AT1	Paper Capacity: 500 sheets x 3 (80 gsm) Paper Type: Thin, Plain, Recycled, Thick, Colour, Labels, Bond Paper Size: A4, A5, A5R, A6, B5, Custom size: 101.6 x 148.0 mm to 215.9 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 642 x 657 x 456 mm (attached to the main unit) Weight: Approx. 24 kg
Network	Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP Authentication, POP Authentication before SMTP, S/MIME	Cassette Module-AJ	Paper Capacity: 500 sheets (80 gsm) Paper Type: Thin, Plain, Recycled, Thick, Colour, Labels, Bond Paper Size: A4, A5, A5R, A6, B5, Custom size: 101.6 x 148.0 mm to 215.9 x 355.6 mm Paper Weight: 60 to 163 gsm Power Source: From the Main Unit Dimensions (W x D x H): 521 x 474 x 130 mm (attached to the main unit) Weight: Approx. 7 kg
Document	Standard: Secure Print, Adobe LiveCycle® Rights Management ES2.5 Integration, Encrypted PDF, Encrypted Secure Print, Device signature, Secure Watermarks Optional: User signature		
ENVIRONMENTAL SPECIFICATIONS			
Operating Environment	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)		
Power source	220-240 V, 50/60 Hz, 4.3 A		
Plug (Main Unit)	CEE 7/7 (230V)		
Power consumption	Maximum: Approx. 1,500 W Copying with ADF: Approx. 739 W* Standby: Approx. 49.9 W* Sleep mode: Approx. 1.0 W Plug-in Off: Approx. 0.4 W Typical Electricity Consumption (TEC) rating** 1.8 kWh * Reference value (measured one unit) ** As per USA Energy Star 2.0		
Noise levels	Sound Power Level (LwAd) Active: 73.3 db or Less* Standby: iR-ADV C475i III: 4.5 B** iR-ADV C475iZ III: 4.3 B** Sound Pressure (LpAm) Bystander's position* Active(BW): iR-ADV C475i III: 50 db (1-sided), 52 db (2-sided) iR-ADV C475iZ III: 50 db (1-sided), 53 db (2-sided) Active(CL): iR-ADV C475i III: 51 db (1-sided), 53 db (2-sided) iR-ADV C475iZ III: 51 db (1-sided), 54 db (2-sided) Standby* iR-ADV C475i III: 28 db, iR-ADV C475iZ III: 27 db * DE-UZ205 (2017) compliant (*Data taken from Blue Angel Standard value) ** Reference value: measured only one unit with ISO7779, described with ISO9296 (1998)		
Standards	Blue Angel		

TECHNICAL SPECIFICATIONS

imageRUNNER ADVANCE C475i III series

OUTPUT FEATURES

Finisher Model (IR-ADV C475iZ III)

Number of Inner Trays: 2
 Upper Tray Capacity*: A4, A5, B5, Custom size (148.0 x 210.0 mm to 215.9 x 355.6 mm): 400 sheets
 Lower Tray Capacity*: A4, A5, B5, Custom size (148.0 x 210.0 mm to 215.9 x 355.6 mm): 100 sheets
 Main unit output tray*: 400 sheets
 * 80 gsm
 Paper Type: Thin, Plain, Recycled, Thick, Colour, Bond
 Staple Paper Weight: 60 to 120 gsm (available with upper tray)
 Staple Position: Corner
 Staple Paper Size: A4, Custom size (210.0 x 279.4 mm to 215.9 x 355.6 mm)
 Staple Capacity: 30 sheets (60 to 90 gsm), 20 sheets (91 to 120 gsm)

HARDWARE ACCESSORIES

Card Readers

MICARDPLUS FOR ULM - A proximity card reader for card based user authentication, supporting multiple card technologies (HID, HiTag, Casi Rusco, Indala and MiFare etc.). Integrates with Universal Login Manager and uniFLOW
 COPY CARD READER-F1 - Magnetic physical card access system. (Integrates with Department ID, not for use with uniFLOW)
 COPY CARD READER ATTACHMENT-B5 - Attachment kit for Copy Card Reader-F1 only.

SYSTEM AND CONTROLLER OPTIONS

Print Accessories

PCL INTERNATIONAL FONT SET-A1 - Adds PCL support for Andale Mono WT J/K/S/T (Japanese/Korean/Simplified Chinese/Traditional Chinese).

Send Options

UNIVERSAL SEND TRACE & SMOOTH PDF KIT-A1 - Enables the device to create and send Trace and Smooth PDF

UNIVERSAL SEND DIGITAL USER SIGNATURE KIT-C1 - Ensures the authenticity of a PDF/XPS by identifying the user that sent the document through a visible and/or invisible digital signature.

Barcode Printing

BARCODE PRINTING KIT-D1 - Provides the ability to print 1D and 2D barcodes on output using jet caps technology.

System Accessories

COPY CONTROL INTERFACE KIT-A1: Allows connection (CCVI I/F) between 3rd party copy control terminal and Canon's IR-ADV range for cost recovery use.

CONNECTION KIT - A1 for BLUETOOTH LE - Bluetooth chip is an option for enabling the communication between main unit and other devices using Bluetooth

NFC Kit-C1 - NFC Control Panel is optional kit enabling the communication between main unit and other devices using NFC. For Flat panel

Fax Accessories

SUPER G3 FAX BOARD-AT1 - Adds fax functionality.

REMOTE FAX KIT-A1 - Enables the device to send and receive fax from another device connected with a fax board.

IP FAX EXPANSION KIT-B1 - (Requires Super G3 FAX Board-AT1) Enables users to send and receive Fax documents via IP Fax network

OTHER OPTIONS

Accessibility Accessories

ADF ACCESS HANDLE-A1 - Attaches to the document feeder, making access easier for seated users.

Staple Cartridge

STAPLE-P1 - For stapling (5,000 pcs x 2)

For a complete list of all hardware accessories, please refer to our website specifications page or online product configurator.

Software & Solutions



Certifications and compatibility



Canon Ireland
 3006 Lake Drive
 Citywest, Saggart
 Co. Dublin, Ireland
 Telephone No: 01 2052400
 2052400
 Facsimile No: 01 2052525
 canon.ie

Canon (UK) Ltd
 Woodhatch
 Reigate
 Surrey RH2 8BF
 Telephone No: 01737 220000
 220000
 Facsimile No: 01737 220022
 canon.co.uk

Canon Inc.
 canon.com
Canon Europe
 canon-europe.com
 English edition
 © Canon Europa N.V., 2019